

## Real-Time Interface & Conversion Item

## Features



- ➔ Fully supported by the SureLine® Software Suite
- ➔ TCP/IP, UDP/IP, and Serial to LAN Protocol Conversions
- ➔ Each unit features 4 rear DB25 Serial ports
- ➔ Dual Front Gigabit Ethernet ports
- ➔ 1U rack mountable or table-top design

**Sunhillo's Real-Time Interface & Conversion Item (RICI)** is a versatile and modular platform designed for surveillance and sensor data formatting, filtering, and conversions.

**The RICI 6000** is the latest iteration in the highly deployed and successful RICI product line, which is used across the FAA and trusted by ANSP's around the world. The RICI 6000 is a form, fit and function replacement for the RICI 5000, and uses readily available components, ensuring the RICI is supportable for the foreseeable future. The updated RICI features the latest technology and increased throughput.

**The RICI** is an ideal solution for networks requiring low-density, high-speed system interfacing to multiple serial ports with the ability to scale to future network demands. Running Sunhillo's SureLine® Core software, the


RICI is a compact FPGA-based signal processing platform that enables synchronous, asynchronous and BISYNC serial plus LAN inter-connectivity.

**Common conversions** performed by the RICI include message format transformations between surveillance data in ECGP, SGF, CD-2, ASR, ASTERIX, ADS-B, MAR, TPS75, Mode 4, ARTS, AIRCAT-500, and Mode S, in addition to sync, async serial, and LAN formats. Visit the Sunhillo SureLine Software Suite webpage for a full conversion capability matrix. We are constantly adding new conversions. If the conversion you require is not listed, please contact us.

**The RICI** provides IP-based network connectivity via dual Gigabit Ethernet ports located on the front panel. Each RICI serves as the interface to 4 serial ports of data. The unit can also be used for

LAN-to-LAN data formatting, filtering, and/ or conversion. Standard serial cables connect directly to the rear of each DB25 connector, maintaining independent high speed connectivity in the Serial-to-LAN data configuration.

# Front and Rear Panels

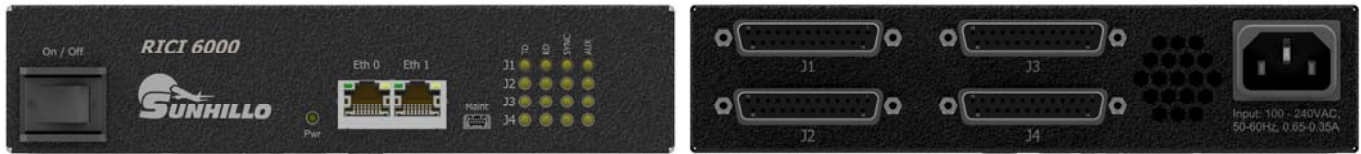

## Technical Specifications\*

### Serial Port Controls

- RS-232 (V.28), RS-422, X.21 (V.11), V35 (V.35 & V.28), EIA-530A (V.10 & V.11), RS-449/V.36 (V.10 & V.11), RS-485

### Ethernet

- 10BASE-T, 100BASE-T, 1000BASE-T, IEEE-802.3

### Protocols

- Synchronous, Asynchronous, HDLC/SDLC, Bi-Sync, Mono-Sync, TCP/IP, UDP/IP

### Message Formats

- ASTERIX (e.g., CAT 001, 002, FAA 033, 034, 048, and others), CD-2, ASR-9/11, Mode 4, Mode S, MAR, TPS75, ARTS, AIRCAT-500, ECGP, SGF, ADS-B, custom, and more

### Encryption Plug-in

- Processor includes Crypto-Accelerator for future plug-ins

### Clock Sources

- DCE, DTE, Split Clock (individual clock receive and transmit on each port)

### Power

- 13.5W Max per unit
- 100-240 VAC, 50-60Hz, 2A Max

### MTBF

- 794,626 Hours at 30°C

### Optional Rackmount Sleeve Kit (P/N 010-U-RMS)

- 1U rackmount for standard 19-inch racks
- Captive fasteners allow for fast removal and replacement
- Rackmount sleeve has space for up to two RIC1 6000s

### Dimensions

Single RIC1 6000:

- Height: 1.61 in / 41 mm
- Width: 7.31 in / 185.68 mm
- Depth: 9.17 in / 233 mm

Populated 1U Sleeve:

- Height: 1.75 in / 44.45 mm
- Width: 17 in / 431.8 mm
- Depth: 9.25 in / 234.95 mm

### Weight (unpacked)

- Single RIC1 6000: 3 lbs / 1.36 kg
- Empty Sleeve: 3 lbs / 1.36 kg
- Fully Populated Sleeve: 9 lbs / 4.08 kg

### Environmental (Tested to MIL-STD-810G)

- Storage Temperature: -50°C to +60°C
- Operating Temperature: 0°C to +50°C
- Operating Relative Humidity Range: 10-95%, noncondensing
- Operating Altitude: -300 ft to 10,000 ft

### Certifications and Compliance

- CE Mark
- RoHS2 Directive 2011/65/EU as amended by (EU) 2015/863
- REACH
- FCC Part 15, Class B
- UL/CSA/IEC/EN 62368-1
- ETL for Canada and US, 3023031
- FAA-G-2100H: Power

\*Preliminary Datasheet, technical specifications are subject to change

